


# HPX100 Trixbox CE Appliance



The HPX100 trixbox CE Appliance comes pre-installed with the latest stable version of trixbox CE. The appliances unique advantages include small size, quiet, fanless operation and low power consumption. The trixbox CE Appliance is perfect for SMB IPPBX installs.

## HPX100 Trixbox CE Appliance Core Features

Features	Specifications
RAM	1GB RAM
Hard Drive	320GB Hard Drive
RAID	No
Processor	Intel Atom 1.66GHz
Expansion Slots	PCI or PCI-E
Ethernet Ports	Single 10M/100M NIC
Power Supply	Single PSU

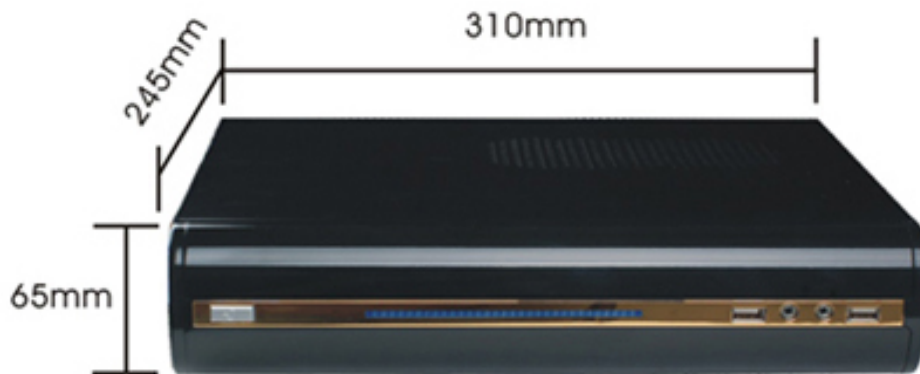

- Stable version of tribox CE preloaded
- Small form factor
- quiet, fanless operation and low power consumption

## Trixbox CE Micro Appliance Technical Specifications

### • Features

- **CPU**
  - Intel Atom 1.66GHz
- **Memory**
  - 1GB DDR2-800
- **Storage**
  - 320GB SATAII Hard Drive (**included**)
- **Display & Graphics**
  - Intel GMA3150 graphics acceleration
- **Audio**
  - High definition 2.0
  - Line-out, Line-in
- **Networking**
  - 10/100M BaseT Ethernet
- **USB**
  - 2 USB 2.0 High Speed ports

- **Software**
  - **BIOS**
    - AMI BIOS
    - Bootable from HDD, USB thumb drive, USB CDROM, USB hard disk
  - **Compatible Operating Systems**
    - Windows 7 Professional
    - Windows XP Home SP3
    - Ubuntu Linux 8.04
    - CentOS
    - Other operating systems can be installed by user
- **Mechanical and Environmental**
  - **Case**
    - Metal and plastic
  - **Dimensions**
    - 310 x 245 x 65 mm
  - **Weight**
    - 3000 grams – including hard disk
  - **Operating Temperature**
    - 0 – 45 deg C with hard disk
    - 0 – 70 deg C with SSD
  - **Power**
    - 12V single supply
    - **Comes with 12v Power Supply**
  - **Power Consumption**
    - 15W at low CPU load
    - 26W at full CPU load
    - <18W at standby